


Electro Hydraulic 4 post lift specially designed for lifting motor vehicles, with mechanical synchronization by steel cables, mechanical lock with automatic engagement and pneumatic release. Moreover, each lifting platform has a ramp to facilitate access of low vehicles. with overload valve in the power unit.

Optionally can be used for alignment by adding the alignment kit.


## OPTIONAL ACCESSORIES

### ALIGNMENT KIT

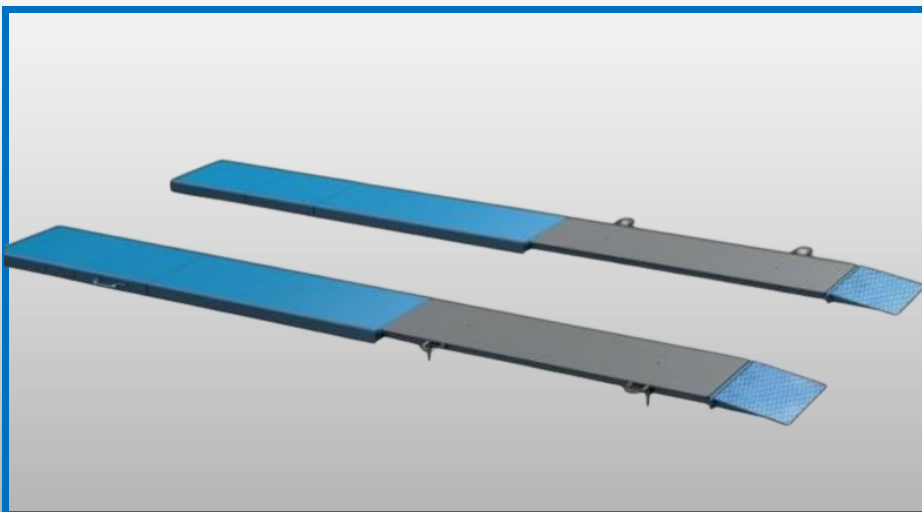


### CENTRAL JACK





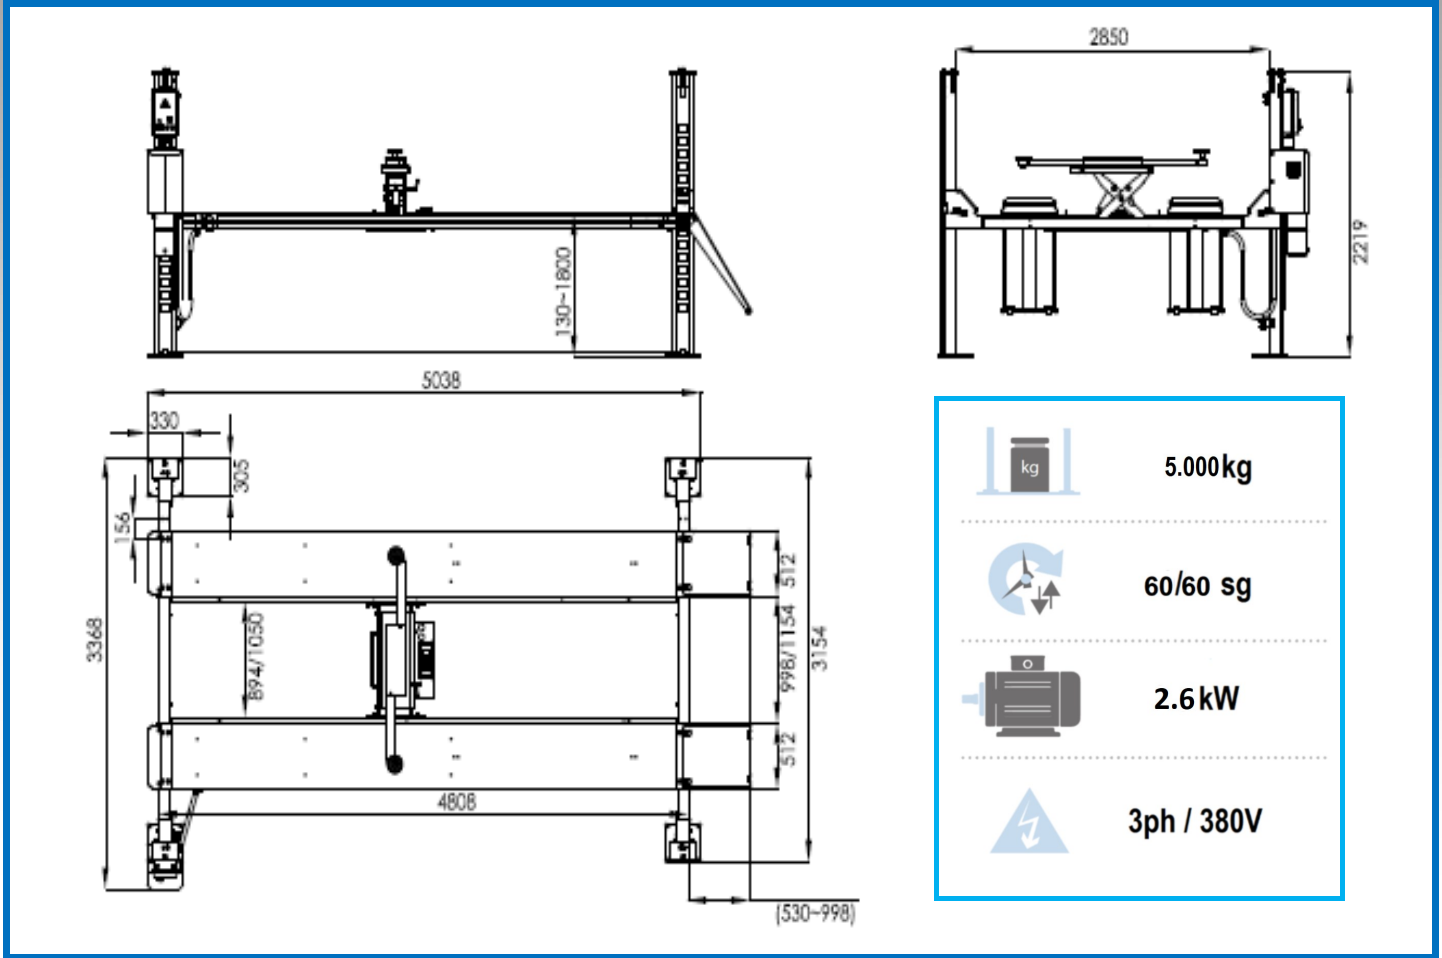


## SAFETY DEVICES

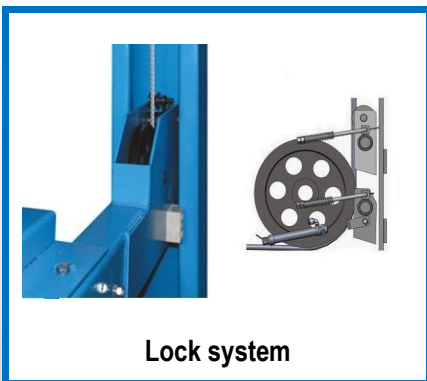

## TECHNICAL DATA WITHOUT ALIGNMENT KIT


Capacity	5.000 kg
Power supply	380 V
Motor power	2.6 kW
System type	Electro-hydraulic
Synchronization Type	Steel cable
Lock release	Pneumatic
Maximum lifting height	1.800 mm
Minimum lifting height	130 mm
Overall height	2.219 mm
Overall width	3.368 mm
Overall length	5.038 mm
Jack capacity	3.200 kg
Lifting/Lowering time	60/60 sg
Noise level	< 80 dB( A)
Packing weight	1.250 kg
Packing size	mm

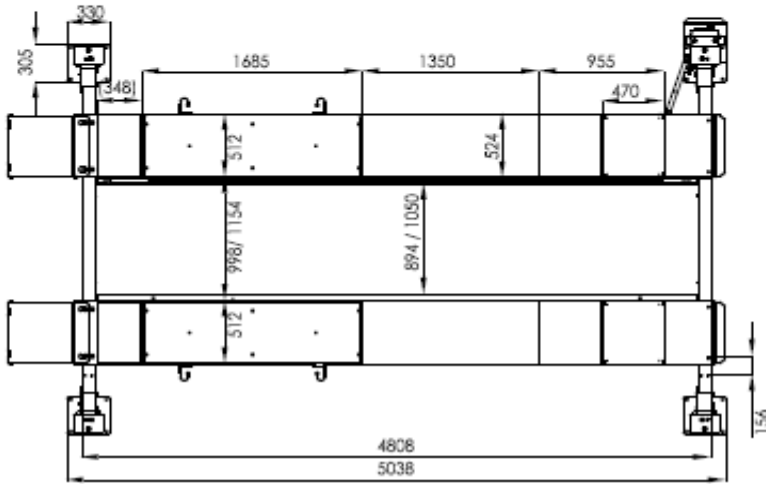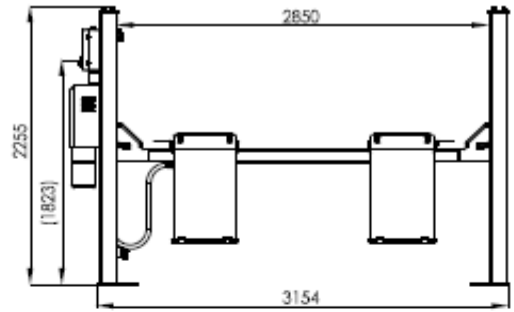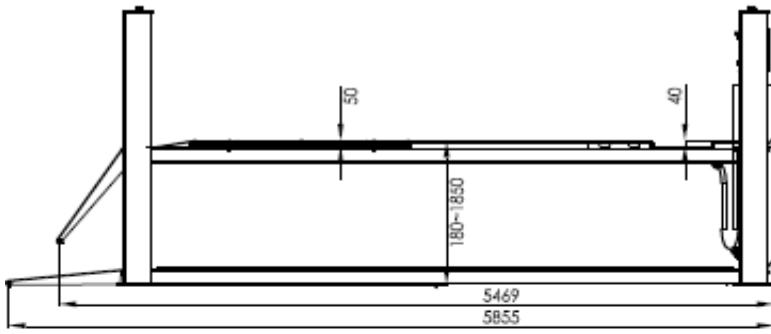


	<b>5.000kg</b>
	<b>60/60 sg</b>
	<b>2.6kW</b>
	<b>3ph / 380V</b>



**Slide rear plates**



**Secondary lift 3.2 T**



**Turntables can be placed in different positions**



**Transmission system**

## TECHNICAL DATA WITH ALIGNMENT KIT

<b>Capacity</b>	<b>5.000 kg</b>
<b>Power supply</b>	<b>380 V</b>
<b>Motor power</b>	<b>2.6 kW</b>
<b>System type</b>	<b>Electro-hydraulic</b>
<b>Synchronization Type</b>	<b>Steel cable</b>
<b>Lock release</b>	<b>Pneumatic</b>
<b>Maximum lifting height</b>	<b>1.850 mm</b>
<b>Minimum lifting height</b>	<b>180 mm</b>
<b>Overall height</b>	<b>2.255 mm</b>
<b>Overall width</b>	<b>3.459 mm</b>
<b>Overall length</b>	<b>5.038 mm</b>
<b>Jack capacity</b>	<b>3.200 kg</b>
<b>Lifting/Lowering time</b>	<b>60/60 sg</b>
<b>Noise level</b>	<b>&lt; 80 dB( A)</b>
<b>Packing weight</b>	<b>1.870 kg</b>
<b>Packing size</b>	<b>mm</b>