


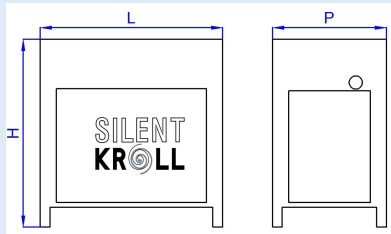

The “refrigerated” type dryer, to purify compressed air equipment, serves to eliminate the humidity that occurs at the outlet of the compressor, due to the temperature of the aspirated air. This humidity occurs because at the exit of the compressor the air is at its level of water vapor saturation. To prevent its use in these conditions damage the installation and equipment, it must be dried.

Besides, the use of the dryer improves air quality, eliminates pollutants through the drainage system, can prevent damage such as corrosion or damage to the pneumatic connections is a very useful accessory to extend the life of your machinery.

MODEL→	SK-DR-10	SK-DR-15
SPECIFICATION↓		
HANDING CAPACITY OF AIR	1.000 (l/min)	2.000 (l/min)
WORK PRESSURE	16 bar	16 bar
TEMPERATURE AIR ENTRY	55 °C	55 °C
WORK TEMPERATURE	40 °C	40 °C
DEWPOINT TEMPERATURE	3 °C	3 °C
POWER	0.6 KW	0.63KW

	Model	L (cm)	P (cm)	H (cm)	Peso (kg)
	SK-DR-10	70	50	66	47
	SK-DR-15	70	50	66	48